



Type 6128 can be combined with...



Type 2507


Cable Plug

2/2- or 3/2-way- Rocker Solenoid Valve

- Direct acting
- Hermetic isolation of fluid
- 0 ... 10 bar¹⁾
- DN 2 ... 3 mm
- Sub-base, threaded port
- 22mm width per station


The 6128 analytical solenoid valve combines all state of the art features in a compact design. With high reliability, virtually no heat transfer between fluid and coil, low internal volume and Burkert's expertise in supplying customized solutions, these valves are a perfect fit even for the most demanding applications.

Circuit function A




2/2-way valve,
direct acting,
normally closed

Circuit function B




2/2-way valve,
direct acting,
normally open

Circuit function C



3/2-way valve,
direct acting, when
de-energised Port A
exhausted

Circuit function D



3/2-way valve,
direct acting, when de-
energised Port B pres-
surised

Technical data


Body material G, NPT connection subbase connection	PEEK and PPS PPS
Seal material	EPDM or FKM
Medium	Resistant to neutral and slightly aggressive fluids (see chemical resistance chart); technical vacuum
Medium temperature	0 °C ... +70 °C
Ambient temperature	0 °C ... +60 °C
Viscosity	max. 21 mm ² /s
Port connection	Sub-base G 1/8 NPT 1/8 on request
Operating voltages	24 V DC, 230 V / 50 Hz Other voltages on request
Voltage tolerance	± 10%
Power consumption	5 W
Duty cycle	100 % continuous rating
Electrical connection	<ul style="list-style-type: none"> ▪ Acc. to Form B industrial standard for cable plug Type 2507 ▪ Rectangular plug ▪ 500mm leads on request
Manual override	Standard
Installation	As required, preferably with actuator upright
Protection class	IP40

¹⁾ Pressure values [bar]: Measured as overpressure to the atmospheric pressure

Response times

Orifice DN [mm]	Kv value water [m ³ /h]	QnN value air [l/min]	Pressure range [bar] ¹⁾	Max. Pressure difference [bar]	Response times	
					Opening [ms]	Closing [ms]
2.0	0.10	104	Vacu-10	10	18	8
3.0	0.13	136	Vacu-3	3	18	8

- Kv value [m³/h]: Flow rate for water,
Measured at +20 °C, 1 bar¹⁾ pressure difference
- Response times [ms]:
Measured at valve outlet at 3 bar¹⁾ and +20°C according to ISO 12238.
Opening Pressure rise from 0 ... 10%
Closing Pressure drop from 100 ... 90%


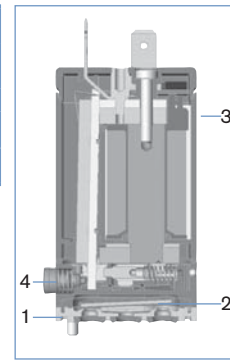


1. Valve body, PEEK / PPS
2. Diaphragm, EPDM or FKM
3. Coil body, PA
4. Manual override, PPS

Ordering chart

Circuit function	Orifice DN [mm]	Body material	Seal material	Voltage/frequency [V/Hz]	Port connection	Electrical connection	Item no.
A 	2.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 758
						Tag connector Form B	160 759
		PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 760	
					Tag connector Form B	160 761	
		PPS	EPDM	24 V/DC	Sub-base	Rectangular plug	160 762
						Tag connector Form B	160 763
	PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 764		
				Tag connector Form B	160 765		
	3.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 766
						Tag connector Form B	160 767
		PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 768	
					Tag connector Form B	160 769	
PPS		EPDM	24 V/DC	Sub-base	Rectangular plug	160 770	
					Tag connector Form B	160 771	
PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 772			
			Tag connector Form B	160 773			
B 	2.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	155 561
						Tag connector Form B	160 774
		PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	181 398	
					Tag connector Form B	160 775	
		PPS	EPDM	24 V/DC	Sub-base	Rectangular plug	160 776
						Tag connector Form B	160 777
	PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 778		
				Tag connector Form B	160 779		
	3.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 780
						Tag connector Form B	160 781
		PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 782	
					Tag connector Form B	160 783	
PPS		EPDM	24 V/DC	Sub-base	Rectangular plug	160 784	
					Tag connector Form B	160 785	
PEEK/PPS	230 V/50 Hz	G 1/8	Rectangular plug	160 786			
			Tag connector Form B	160 787			

Ordering chart (continued)

Circuit function	Orifice DN [mm]	Body material	Seal Material	Voltage/frequency [V/Hz]	Port Connection	Electrical connection	Item no.
C 	2.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 797
						Tag connector Form B	150 790
		PEEK/PPS	G 1/8	Rectangular plug	160 798		
				Tag connector Form B	160 799		
		PPS	EPDM	24 V/DC	Sub-base	Rectangular plug	160 801
						Tag connector Form B	150 791
	PEEK/PPS	G 1/8	Rectangular plug	160 802			
			Tag connector Form B	160 803			
	3.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 805
						Tag connector Form B	150 792
		PEEK/PPS	G 1/8	Rectangular plug	160 806		
				Tag connector Form B	160 807		
PPS		EPDM	24 V/DC	Sub-base	Rectangular plug	160 808	
					Tag connector Form B	150 793	
PEEK/PPS	G 1/8	Rectangular plug	160 810				
		Tag connector Form B	160 811				
D 	2.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 813
						Tag connector Form B	150 080
		PEEK/PPS	G 1/8	Rectangular plug	160 814		
				Tag connector Form B	160 815		
		PPS	EPDM	24 V/DC	Sub-base	Rectangular plug	160 816
						Tag connector Form B	150 794
	PEEK/PPS	G 1/8	Rectangular plug	160 818			
			Tag connector Form B	160 819			
	3.0	PPS	FKM	24 V/DC	Sub-base	Rectangular plug	160 820
						Tag connector Form B	150 795
		PEEK/PPS	G 1/8	Rectangular plug	160 821		
				Tag connector Form B	160 822		
PPS		EPDM	24 V/DC	Sub-base	Rectangular plug	160 823	
					Tag connector Form B	150 796	
PEEK/PPS	G 1/8	Rectangular plug	160 824				
		Tag connector Form B	160 825				
PPS	EPDM	24 V/DC	Sub-base	Rectangular plug	160 826		
				Tag connector Form B	150 796		
PEEK/PPS	G 1/8	Rectangular plug	160 827				
		Tag connector Form B	160 828				


- Rectangular plug supplied **without** cable plug (see ordering chart for accessories).
- Manual override as standard.
- Other versions on request.

Ordering chart for manifold

Multiple Manifolds with individual service port (G1/8) and diverter function on 2 common channels (G1/8); Delivery without valves; Material: anodized aluminium


Manifold	A [mm]	Item no.
2-fold	47	669 571
3-fold	59	672 633
4-fold	81	669 572
5-fold	113	672 661
6-fold	135	669 570
10-fold	223	672 660

▪ Other versions on request.

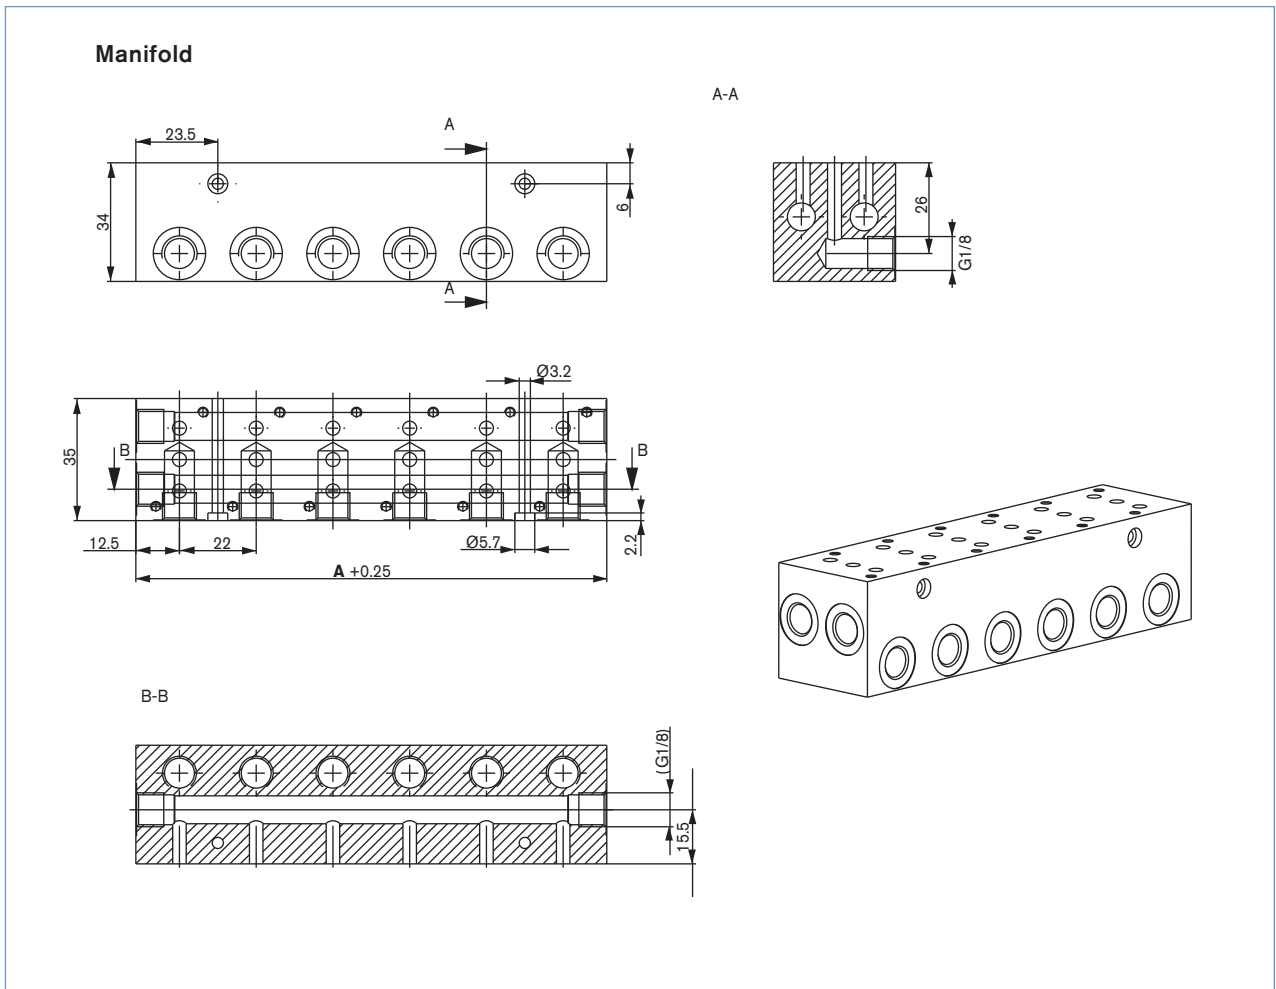




Ordering chart for accessories

Cable Plug Type 2507 according to Industrial standard Form B

	Accessories	Version	Voltage	Item no.
	Cable Plug Type 2507	without Circuitry	0 ... 250 V AC/DC	423 845
		with LED	24 V AC/DC	423 849
		with varistor	24 V AC/DC	423 846
		with rectifier, LED and varistor	24 V AC/DC	423 853


Rectangular plug Type 2505

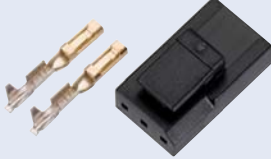	Accessories	Item no.
	with 3m cable	133 486
	with 300mm leads	644 068
	Single contact for individual mounting	644 067

Dimensions [mm]

Valves with tag connector Form B - Industrial standard


(The middle connection is not applicable in the case of the 2/2-way version)

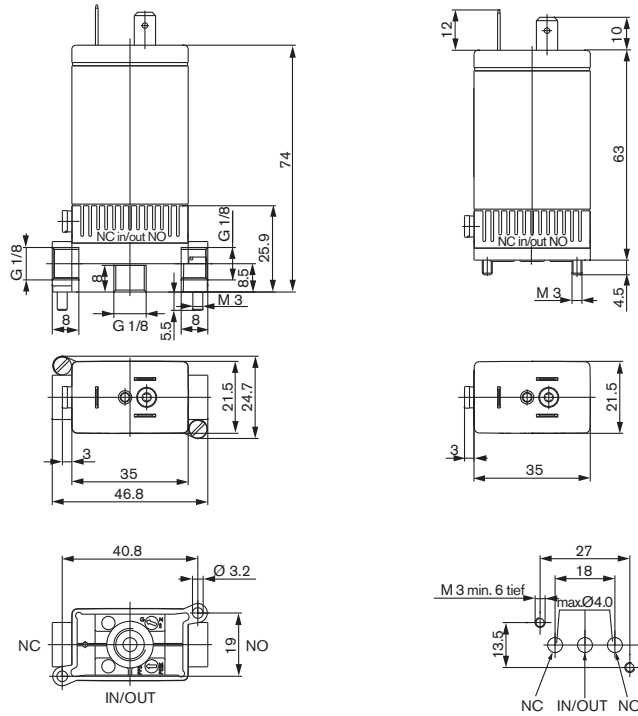

Threaded port body G1/8 manifold mounting (2xM3 screws)

Flange interface for manifold mounting (2xM3 screws)

Valves with rectangular plug

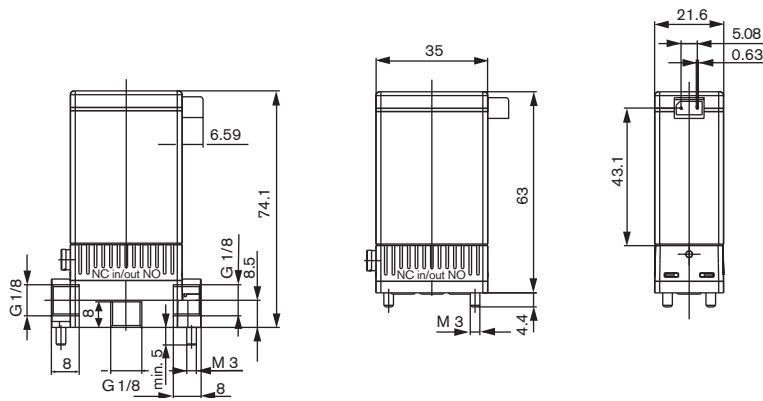

DTS 1000011050 EN Version: I Status: RL (released | freigegeben | validé) printed: 26.10.2009

To find your nearest Bürkert facility, click on the orange box →

www.burkert.com

In case of special application conditions, please consult for advice.

Subject to alteration.
© Christian Bürkert GmbH & Co. KG

0910/6_EU-en_00891862